
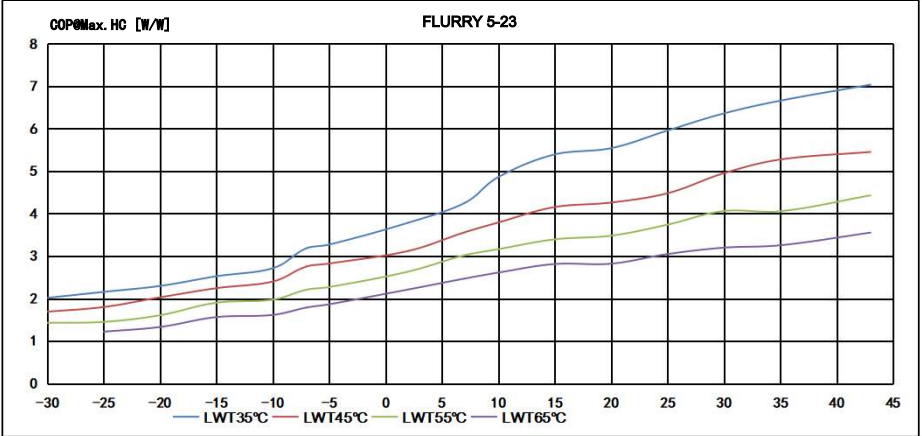


FLURRY 5-23																
Max. Heating Capacity (kW)																
Ambient Temperature (°C)																
Water outlet(°C)	-30	-25	-20	-15	-10	-7	-5	2	7	10	15	20	25	30	35	43
35	10.76	11.58	12.40	13.91	14.76	17.20	17.72	20.74	23.41	26.48	25.73	27.15	25.85	26.71	27.57	28.43
45	10.12	10.78	12.33	13.71	14.45	16.61	17.45	20.37	23.27	24.79	23.72	24.71	23.47	24.31	26.16	26.83
50	9.80	10.69	11.94	13.60	14.29	16.31	17.01	20.10	23.14	24.13	23.11	24.10	22.79	23.58	24.79	26.03
55	9.48	10.61	11.55	13.50	14.15	16.01	16.57	19.83	23.00	23.46	22.50	23.49	22.44	22.86	23.52	25.69
60	8.59	9.87	10.95	12.62	13.13	14.73	15.12	18.34	21.43	21.89	22.13	22.87	21.77	22.03	23.27	25.04
65		9.41	10.48	12.08	12.54	14.07	14.41	16.79	18.94	20.21	20.87	21.07	21.30	21.65	22.16	24.19
70			10.08	11.62	11.78	13.67	14.17	14.90	18.92	19.89	20.87	21.43	20.87	21.04	21.11	
75				9.29	9.42	12.58	12.96	13.74	17.13	18.06	18.14	18.26	18.58	18.90		
Power Input (kW)																
Ambient Temperature (°C)																
Water outlet(°C)	-30	-25	-20	-15	-10	-7	-5	2	7	10	15	20	25	30	35	43
35	5.34	5.37	5.40	5.51	5.44	5.40	5.42	5.48	5.51	5.45	4.77	4.90	4.34	4.20	4.14	4.04
45	5.99	5.99	6.08	6.11	6.02	6.03	6.18	6.53	6.54	6.54	5.71	5.80	5.24	4.91	4.96	4.92
50	6.32	6.65	6.64	6.70	6.60	6.64	6.74	6.81	7.02	6.98	6.17	6.26	5.62	5.28	5.39	5.36
55	6.64	7.32	7.19	7.10	7.17	7.25	7.30	7.53	7.62	7.42	6.63	6.75	6.00	5.63	5.80	5.80
60	6.53	7.31	7.33	7.22	7.27	7.34	7.24	7.46	7.55	7.37	7.00	7.07	6.39	5.99	6.04	6.03
65		7.72	7.88	7.73	7.77	7.87	7.73	7.59	7.67	7.74	7.42	7.47	6.99	6.77	6.81	6.81
70			8.20	8.04	7.99	8.08	7.86	7.77	7.86	7.89	8.06	8.13	7.61	6.69	6.55	
75				8.31	8.26	8.17	8.05	8.33	8.33	8.43	8.44	8.42	8.11	7.13		
COP(kW/kW)																
Ambient Temperature (°C)																
Water outlet(°C)	-30	-25	-20	-15	-10	-7	-5	2	7	10	15	20	25	30	35	43
35	2.01	2.16	2.30	2.52	2.71	3.19	3.27	3.78	4.25	4.86	5.39	5.54	5.96	6.36	6.66	7.04
45	1.69	1.80	2.03	2.24	2.40	2.75	2.82	3.12	3.56	3.79	4.15	4.26	4.48	4.95	5.27	5.45
50	1.55	1.61	1.80	2.03	2.17	2.46	2.52	2.95	3.30	3.46	3.75	3.85	4.06	4.47	4.60	4.86
55	1.43	1.45	1.61	1.90	1.97	2.21	2.27	2.63	3.02	3.16	3.39	3.48	3.74	4.06	4.06	4.43
60	1.32	1.35	1.49	1.75	1.81	2.01	2.09	2.46	2.84	2.97	3.16	3.23	3.41	3.68	3.85	4.15
65		1.22	1.33	1.56	1.61	1.79	1.86	2.21	2.47	2.61	2.81	2.82	3.05	3.20	3.25	3.55
70			1.23	1.45	1.47	1.69	1.80	1.92	2.41	2.52	2.59	2.64	2.74	3.14	3.22	
75				1.12	1.14	1.54	1.61	1.65	2.06	2.14	2.15	2.17	2.29	2.65		

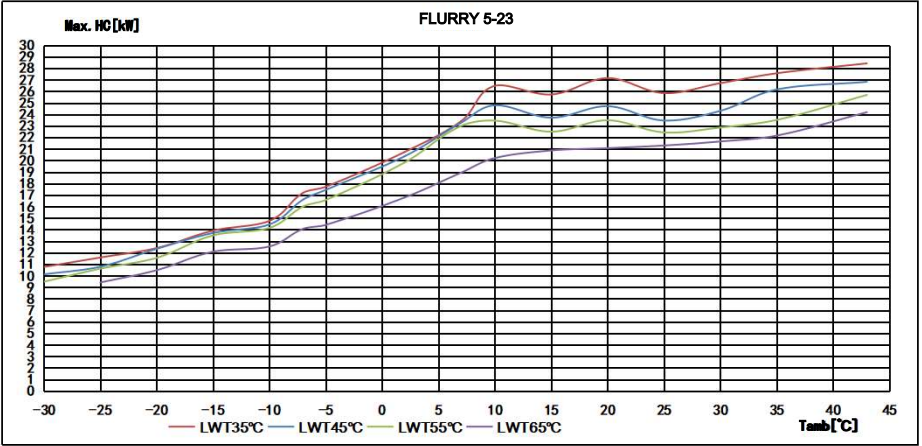

Tamb [°C]